

## wall mounting socket outlet - straight, housing dimensions 102x102 mm




| Product description       |  |
|---------------------------|--|
| BALS-Prd.-Nr              | 110568                                       |
| EAN                       | 4024941938655                                |
| Product category          | TE wall mounting socket outlet Quick-Connect |
| Current                   | 32A  |
| Number of poles           | 3p   |
| Arrangement of phases     | 2P+PE  |
| Position of earth contact | 6 h  |
| Voltage                   | 200 - 250V~                                  |

| Product description    |  |
|------------------------|--|
| Frequency              | 50/60Hz  |
| Protection degree      | IP67   |
| Colour code            | blue RAL 5015  |
| Colour of appliance    | Hinged lid blue RAL 5015, Enclosure grey RAL 7035  |
| Connection design      | screwless spring terminals with Kontex-Kontakt   |
| Maximum conductor size | 10,0 qmm   |
| Cable entry            | 3 sides 2x M20/25, 1 side 1x M20/25, to break out  |
| Height                 | 102mm  |
| Width                  | 102mm  |
| Depth                  | 134mm  |
| Dimension of enclosure | 102x102 mm (HxW)   |
| Material of enclosure  | Polyamide  |
| Contacts               | the contacts are brass nickel plated, The contact carrier is made of high temperature resistant material |

| Additional technical information |                                    |
|----------------------------------|------------------------------------|
|                                  | All cable entries are to break out |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.415 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941938655 |
| Length         | 134 mm        |
| Width          | 102 mm        |
| Height         | 102 mm        |
| Weight         | 0.416 kg      |
| Volume         | 1,394.136 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941827515 |
| Length         | 330 mm        |
| Width          | 216 mm        |
| Height         | 260 mm        |
| Weight         | 4.376 kg      |
| Volume         | 17,062.5 ccm  |

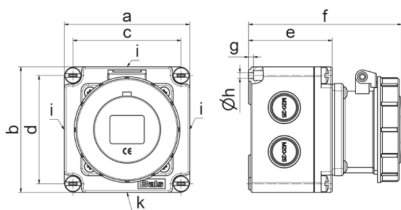

1 MB 121

| Ampere Polzahl             | 16<br>3  | 16<br>4  | 16<br>5  | 32<br>3  | 32<br>4  | 32<br>5  |
|----------------------------|----------|----------|----------|----------|----------|----------|
| a                          | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    |
| b                          | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    |
| c                          | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     |
| d                          | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     |
| e                          | 68,0     | 68,0     | 68,0     | 68,0     | 68,0     | 68,0     |
| f                          | 124,0    | 125,0    | 124,0    | 134,0    | 134,0    | 134,0    |
| g                          | 4,0      | 4,0      | 4,0      | 4,0      | 4,0      | 4,0      |
| h ø                        | 4,5      | 4,5      | 4,5      | 4,5      | 4,5      | 4,5      |
| i                          | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 |
| k                          | M20/25   | M20/25   | M20/25   | M20/25   | M20/25   | M20/25   |
| Leiter mm <sup>2</sup> min | 1,5      | 1,5      | 1,5      | 2,5      | 2,5      | 2,5      |
| Leiter mm <sup>2</sup> max | 4        | 4        | 4        | 10       | 10       | 10       |