

# panel mounting socket outlet, straight - flange 107x100 fixing centers 85x77




| Product description       |  |
|---------------------------|--|
| BALS-Prd.-Nr              | 13101                                  |
| EAN                       | 4024941131018                          |
| Product category          | Panel mounting socket outlet, straight |
| Current                   | 63A                                    |
| Number of poles           | 4p                                     |
| Arrangement of phases     | 3P+PE                                  |
| Position of earth contact | 7 h                                    |
| Voltage                   | 480 - 500V~                            |

| Product description            |  |
|--------------------------------|--|
| Frequency                      | 50/60Hz  |
| Protection degree              | IP67   |
| Colour code                    | black RAL 9005   |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure grey RAL 7035, Bayonet ring grey RAL 7035                           |
| Connection design              | screw terminal as box terminal with Kontex-contact   |
| Maximum conductor size         | 25.0 qmm   |
| Cable entry                    | other  |
| Height                         | 114mm  |
| Width                          | 111mm  |
| Depth                          | 133mm  |
| Flange size vertical in mm     | 107mm  |
| Flange size horizontal in mm   | 100mm  |
| Drill hole dist. vertical mm   | 85mm   |
| Drill hole dist. horizontal mm | 77mm   |
| Material of enclosure          | Polyamide  |
| Contacts                       | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.55 kg / Piece |
| Packaging      | Bag             |

| Logistics data |               |
|----------------|---------------|
| Content amount | 1 ST          |
| EAN            | 4024941131018 |
| Length         | 133 mm        |
| Width          | 111 mm        |
| Height         | 114 mm        |
| Weight         | 0.551 kg      |
| Volume         | 1,682.982 ccm |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941958554 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 2.914 kg      |
| Volume         | 9,975 ccm     |

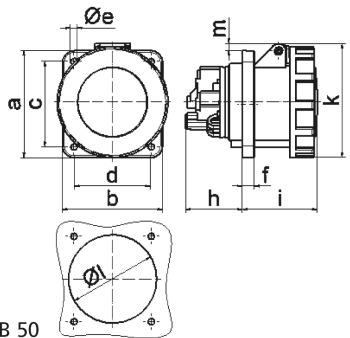

| Ampere Polzahl             | 63<br>3 | 63<br>4 | 63<br>5 |  |  |  |  |
|----------------------------|---------|---------|---------|--|--|--|--|
| a                          | 107,0   | 107,0   | 107,0   |  |  |  |  |
| b                          | 100,0   | 100,0   | 100,0   |  |  |  |  |
| c                          | 85,0    | 85,0    | 85,0    |  |  |  |  |
| d                          | 77,0    | 77,0    | 77,0    |  |  |  |  |
| e ø                        | 6,5     | 6,5     | 6,5     |  |  |  |  |
| f                          | 12,0    | 12,0    | 12,0    |  |  |  |  |
| h                          | 56,5    | 56,5    | 56,5    |  |  |  |  |
| i                          | 76,0    | 76,0    | 76,0    |  |  |  |  |
| k                          | 113,0   | 113,0   | 113,0   |  |  |  |  |
| l ø                        | 88,0    | 88,0    | 88,0    |  |  |  |  |
| m                          | 7,0     | 7,0     | 7,0     |  |  |  |  |
| Leiter mm <sup>2</sup> min | 6       | 6       | 6       |  |  |  |  |
| Leiter mm <sup>2</sup> max | 25      | 25      | 25      |  |  |  |  |

4 MB 50