

Panel mounting socket outlet straight - flange 120x120 fixing centers 100x100




| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 13449 |
| EAN | 4024941134491 |
| Product category | Panel mounting socket outlet, straight |
| Current | 125A |
| Number of poles | 4p |
| Arrangement of phases | 3P+PE |
| Position of earth contact | 9 h |
| Voltage | 200 - 250V~ |

| Product description | |
|--------------------------------|--|
| Frequency | 50/60Hz |
| Protection degree | IP67 |
| Colour code | blue RAL 5015 |
| Colour of appliance | Hinged lid blue RAL 5015, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035 |
| Connection design | screw terminal as box terminal with Kontex-contact |
| Maximum conductor size | 70.0 qmm (possible limitation by the used cable entry) |
| Cable entry | other |
| Height | 129mm |
| Width | 125mm |
| Depth | 166mm |
| Flange size vertical in mm | 120mm |
| Flange size horizontal in mm | 120mm |
| Drill hole dist. vertical mm | 100mm |
| Drill hole dist. horizontal mm | 100mm |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data | |
|----------------|-----------------|
| Weight/pcs | 1.01 kg / Piece |
| Packaging | Bag |

| Logistics data | |
|----------------|---------------|
| Content amount | 1 ST |
| EAN | 4024941134491 |
| Length | 166 mm |
| Width | 125 mm |
| Height | 129 mm |
| Weight | 1.011 kg |
| Volume | 2,676.75 ccm |
| Packaging | Carton |
| Content amount | 5 ST |
| EAN | 4024941830409 |
| Length | 330 mm |
| Width | 216 mm |
| Height | 260 mm |
| Weight | 5.276 kg |
| Volume | 17,062.5 ccm |

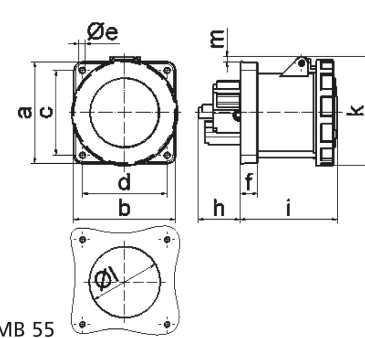

| Ampere Polzahl | 125 3 | 125 4 | 125 5 | | | |
|----------------------------|-------|-------|-------|--|--|--|
| a | 120,0 | 120,0 | 120,0 | | | |
| b | 120,0 | 120,0 | 120,0 | | | |
| c | 100,0 | 100,0 | 100,0 | | | |
| d | 100,0 | 100,0 | 100,0 | | | |
| e ø | 6,5 | 6,5 | 6,5 | | | |
| f | 21,0 | 21,0 | 21,0 | | | |
| h | 50,0 | 50,0 | 50,0 | | | |
| i | 117,0 | 117,0 | 117,0 | | | |
| k | 129,0 | 129,0 | 129,0 | | | |
| l ø | 104,0 | 104,0 | 104,0 | | | |
| m | 6,0 | 6,0 | 6,0 | | | |
| Leiter mm ² min | 25 | 25 | 25 | | | |
| Leiter mm ² max | 70 | 70 | 70 | | | |

4 MB 55