

## Panel mounting socket outlet straight - flange 56x56 fixing centers 44x44

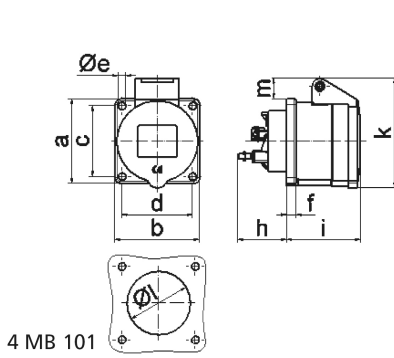


Product description	
BALS-Prd.-Nr	13658
EAN	4024941136587
Product category	Panel mounting socket outlet QUICK-CONNECT, straight
Current	16A
Number of poles	3p
Arrangement of phases	2P+PE
Position of earth contact	7 h
Voltage	480 - 500V~

Product description	
Frequency	50/60Hz
Protection degree	IP44
Colour code	black RAL 9005
Colour of appliance	Hinged lid black RAL 9005, Enclosure grey RAL 7035
Connection design	screwless spring terminals with KONTEX-contact
Maximum conductor size	4,0 qmm
Cable entry	other
Height	72mm
Width	56mm
Depth	89mm
Flange size vertical in mm	56mm
Flange size horizontal in mm	56mm
Drill hole dist. vertical mm	44mm
Drill hole dist. horizontal mm	44mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of polyamide, the contacts are brass

Logistics data	
Weight/pcs	0.087 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941136587
Length	89 mm
Width	56 mm
Height	72 mm
Weight	0.088 kg
Volume	358.848 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941828918
Length	207 mm
Width	162 mm
Height	142 mm
Weight	0.97 kg
Volume	3,750 ccm

 <p>4 MB 101</p>	<b>Ampere</b>	<b>16</b>	<b>16</b>					
	<b>Polzahl</b>	<b>3</b>	<b>4</b>					
	a	56,0	60,0					
	b	56,0	60,0					
	c	44,0	50 - 52					
	d	44,0	50 - 52					
	e Ø	4,4	5,5					
	f	7,0	7,0					
	h	35,5	35,5					
	i	51,0	53,0					
	k	70,0	80,0					
	l Ø	45,0	45,0					
	m	13,0	9,0					
	Leiter mm <sup>2</sup> min	1,5	1,5					
Leiter mm <sup>2</sup> max	4	4						