

panel mounting socket outlet, straight - flange 60x60,
fixing centers 50-52x50-52




| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 13661 |
| EAN | 4024941136617 |
| Product category | Panel mounting socket outlet Quick-Connect, straight |
| Current | 16A |
| Number of poles | 4p |
| Arrangement of phases | 3P+PE |
| Position of earth contact | 4 h |
| Voltage | 100 - 130V~ |

| Product description | |
|--------------------------------|--|
| Frequency | 50/60Hz |
| Protection degree | IP44 |
| Colour code | yellow RAL 1012 |
| Colour of appliance | Hinged lid yellow RAL 1012, Enclosure grey RAL 7035 |
| Connection design | screwless spring terminals with Kontex-Kontakt |
| Maximum conductor size | 4,0 qmm |
| Cable entry | other |
| Height | 78mm |
| Width | 60mm |
| Depth | 88mm |
| Flange size vertical in mm | 60mm |
| Flange size horizontal in mm | 60mm |
| Drill hole dist. vertical mm | 51mm |
| Drill hole dist. horizontal mm | 51mm |
| Material of enclosure | Polyamide |
| Contacts | The contact carrier is made of polyamide, The contacts are brass |

| Logistics data | |
|----------------|-----------------|
| Weight/pcs | 0.12 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |

| Logistics data | |
|----------------|---------------|
| EAN | 4024941136617 |
| Length | 88 mm |
| Width | 60 mm |
| Height | 78 mm |
| Weight | 0.121 kg |
| Volume | 411.84 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941828895 |
| Length | 275 mm |
| Width | 175 mm |
| Height | 137 mm |
| Weight | 1.325 kg |
| Volume | 5,737.5 ccm |

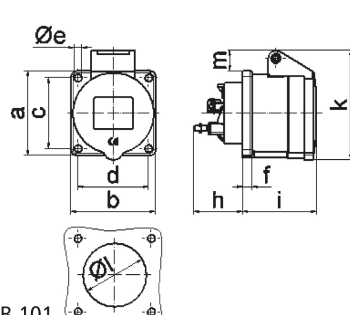

4 MB 101

| Ampere | 16 | 16 | | | | |
|----------------------------|------|---------|--|--|--|--|
| Polzahl | 3 | 4 | | | | |
| a | 56,0 | 60,0 | | | | |
| b | 56,0 | 60,0 | | | | |
| c | 44,0 | 50 - 52 | | | | |
| d | 44,0 | 50 - 52 | | | | |
| e Ø | 4,4 | 5,5 | | | | |
| f | 7,0 | 7,0 | | | | |
| h | 35,5 | 35,5 | | | | |
| i | 51,0 | 53,0 | | | | |
| k | 70,0 | 80,0 | | | | |
| l Ø | 45,0 | 45,0 | | | | |
| m | 13,0 | 9,0 | | | | |
| Leiter mm ² min | 1,5 | 1,5 | | | | |
| Leiter mm ² max | 4 | 4 | | | | |