

## Panel mounting socket outlet straight - flange 60x60 fixing centers 50-52x50-52




Product description	
BALS-Prd.-Nr	13661
EAN	4024941136617
Product category	Panel mounting socket outlet QUICK-CONNECT, straight
Current	16A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	4 h
Voltage	100 - 130V~

Product description	
Frequency	50/60Hz
Protection degree	IP44
Colour code	yellow RAL 1012
Colour of appliance	Hinged lid yellow RAL 1012, Enclosure grey RAL 7035
Connection design	screwless spring terminals with KONTEX-contact
Maximum conductor size	4,0 qmm
Cable entry	other
Height	78mm
Width	60mm
Depth	88mm
Flange size vertical in mm	60mm
Flange size horizontal in mm	60mm
Drill hole dist. vertical mm	51mm
Drill hole dist. horizontal mm	51mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of polyamide, the contacts are brass

Logistics data	
Weight/pcs	0.12 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941136617
Length	88 mm
Width	60 mm
Height	78 mm
Weight	0.121 kg
Volume	411.84 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941828895
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.325 kg
Volume	5,737.5 ccm

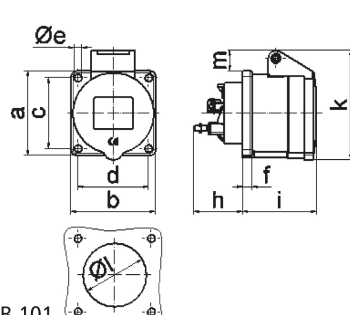

4 MB 101

Ampere	16	16				
Polzahl	3	4				
a	56,0	60,0				
b	56,0	60,0				
c	44,0	50 - 52				
d	44,0	50 - 52				
e Ø	4,4	5,5				
f	7,0	7,0				
h	35,5	35,5				
i	51,0	53,0				
k	70,0	80,0				
l Ø	45,0	45,0				
m	13,0	9,0				
Leiter mm <sup>2</sup> min	1,5	1,5				
Leiter mm <sup>2</sup> max	4	4				