

panel mounting socket outlet, straight - flange 60x60,  
fixing centers 50-52x50-52




Product description	
BALS-Prd.-Nr	13662
EAN	4024941136624
Product category	Panel mounting socket outlet Quick-Connect, straight
Current	16A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	9 h
Voltage	200 - 250V~

Product description	
Frequency	50/60Hz
Protection degree	IP44
Colour code	blue RAL 5015
Colour of appliance	Hinged lid blue RAL 5015, Enclosure grey RAL 7035
Connection design	screwless spring terminals with Kontex-Kontakt
Maximum conductor size	4,0 qmm
Cable entry	other
Height	78mm
Width	60mm
Depth	88mm
Flange size vertical in mm	60mm
Flange size horizontal in mm	60mm
Drill hole dist. vertical mm	51mm
Drill hole dist. horizontal mm	51mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, The contacts are brass

Logistics data	
Weight/pcs	0.109 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941136624
Length	88 mm
Width	60 mm
Height	78 mm
Weight	0.11 kg
Volume	411.84 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941821520
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.215 kg
Volume	5,737.5 ccm

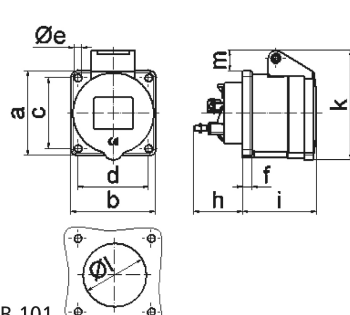

4 MB 101

Ampere	16	16				
Polzahl	3	4				
a	56,0	60,0				
b	56,0	60,0				
c	44,0	50 - 52				
d	44,0	50 - 52				
e Ø	4,4	5,5				
f	7,0	7,0				
h	35,5	35,5				
i	51,0	53,0				
k	70,0	80,0				
l Ø	45,0	45,0				
m	13,0	9,0				
Leiter mm <sup>2</sup> min	1,5	1,5				
Leiter mm <sup>2</sup> max	4	4				