

panel mounting socket outlet, straight - flange 75x75,
fixing centers 60x60




| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 13752 |
| EAN | 4024941137522 |
| Product category | Panel mounting socket outlet Quick-Connect, straight |
| Current | 32A |
| Number of poles | 3p |
| Arrangement of phases | 2P+PE |
| Position of earth contact | 10 h |
| Voltage | > 50V~ |

| Product description | |
|--------------------------------|--|
| Frequency | 100 - 300Hz |
| Protection degree | IP67 |
| Colour code | green RAL 6002 |
| Colour of appliance | Hinged lid green RAL 6002, Enclosure grey RAL 7035, Bayonet ring grey RAL 7035 |
| Connection design | screwless spring terminals with Kontex-Kontakt |
| Maximum conductor size | 10,0 qmm |
| Cable entry | other |
| Height | 97mm |
| Width | 94mm |
| Depth | 111mm |
| Flange size vertical in mm | 75mm |
| Flange size horizontal in mm | 75mm |
| Drill hole dist. vertical mm | 60mm |
| Drill hole dist. horizontal mm | 60mm |
| Material of enclosure | Polyamide |
| Contacts | The contact carrier is made of polyamide, The contacts are brass |

| Logistics data | |
|----------------|-----------------|
| Weight/pcs | 0.21 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |

| Logistics data | |
|----------------|---------------|
| EAN | 4024941137522 |
| Length | 111 mm |
| Width | 94 mm |
| Height | 97 mm |
| Weight | 0.211 kg |
| Volume | 1,012.098 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941830263 |
| Length | 122 mm |
| Width | 222 mm |
| Height | 538 mm |
| Weight | 2.438 kg |
| Volume | 14,332.32 ccm |

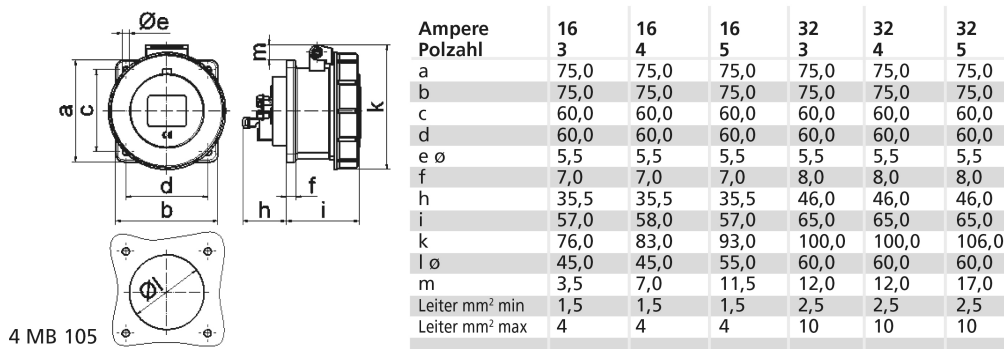

| Ampere | 16 | 16 | 16 | 32 | 32 | 32 |
|----------------------------|------|------|------|-------|-------|-------|
| Polzahl | 3 | 4 | 5 | 3 | 4 | 5 |
| a | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 |
| b | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 |
| c | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |
| d | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |
| e ø | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 |
| f | 7,0 | 7,0 | 7,0 | 8,0 | 8,0 | 8,0 |
| h | 35,5 | 35,5 | 35,5 | 46,0 | 46,0 | 46,0 |
| i | 57,0 | 58,0 | 57,0 | 65,0 | 65,0 | 65,0 |
| k | 76,0 | 83,0 | 93,0 | 100,0 | 100,0 | 106,0 |
| l ø | 45,0 | 45,0 | 55,0 | 60,0 | 60,0 | 60,0 |
| m | 3,5 | 7,0 | 11,5 | 12,0 | 12,0 | 17,0 |
| Leiter mm ² min | 1,5 | 1,5 | 1,5 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 4 | 4 | 4 | 10 | 10 | 10 |