

panel mounting socket outlet, straight - flange 107x100 fixing centers 85x77




| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 1396 |
| EAN | 4024941013963 |
| Product category | Panel mounting socket outlet, straight |
| Current | 63A |
| Number of poles | 3p |
| Arrangement of phases | 2P+PE |
| Position of earth contact | 6 h |
| Voltage | 200 - 250V~ |

| Product description | |
|--------------------------------|--|
| Frequency | 50/60Hz |
| Protection degree | IP67 |
| Colour code | blue RAL 5015 |
| Colour of appliance | Hinged lid blue RAL 5015, Enclosure grey RAL 7035, Bayonet ring grey RAL 7035 |
| Connection design | screw terminal as box terminal with Kontex-contact |
| Maximum conductor size | 25.0 qmm |
| Cable entry | other |
| Height | 114mm |
| Width | 111mm |
| Depth | 133mm |
| Flange size vertical in mm | 107mm |
| Flange size horizontal in mm | 100mm |
| Drill hole dist. vertical mm | 85mm |
| Drill hole dist. horizontal mm | 77mm |
| Material of enclosure | Polyamide |
| Contacts | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.456 kg / Piece |
| Packaging | Bag |

| Logistics data | |
|----------------|---------------|
| Content amount | 1 ST |
| EAN | 4024941013963 |
| Length | 133 mm |
| Width | 111 mm |
| Height | 114 mm |
| Weight | 0.457 kg |
| Volume | 1,682.982 ccm |
| Packaging | Carton |
| Content amount | 5 ST |
| EAN | 4024941958516 |
| Length | 295 mm |
| Width | 185 mm |
| Height | 215 mm |
| Weight | 2.444 kg |
| Volume | 9,975 ccm |

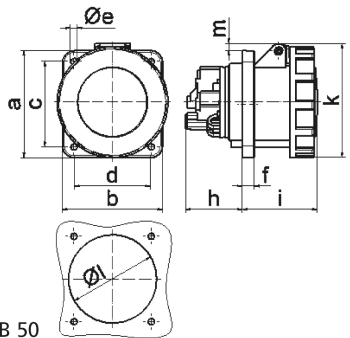

4 MB 50

| Ampere Polzahl | 63 3 | 63 4 | 63 5 | | | | |
|----------------------------|---------|---------|---------|--|--|--|--|
| a | 107,0 | 107,0 | 107,0 | | | | |
| b | 100,0 | 100,0 | 100,0 | | | | |
| c | 85,0 | 85,0 | 85,0 | | | | |
| d | 77,0 | 77,0 | 77,0 | | | | |
| e ø | 6,5 | 6,5 | 6,5 | | | | |
| f | 12,0 | 12,0 | 12,0 | | | | |
| h | 56,5 | 56,5 | 56,5 | | | | |
| i | 76,0 | 76,0 | 76,0 | | | | |
| k | 113,0 | 113,0 | 113,0 | | | | |
| l ø | 88,0 | 88,0 | 88,0 | | | | |
| m | 7,0 | 7,0 | 7,0 | | | | |
| Leiter mm ² min | 6 | 6 | 6 | | | | |
| Leiter mm ² max | 25 | 25 | 25 | | | | |