

## wall mounting socket outlet, fused - housing dimensions 260x160 with fuse base D III




Product description	
BALS-Prd.-Nr	15005
EAN	4024941150057
Product category	Wall mounting socket outlet, fused
Current	63A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~

Product description	
Frequency	50/60Hz
Protection degree	IP67
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Bayonet ring grey RAL 7035, Operating window smoky topaz, Housing screws grey RAL 7035
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	25.0 qmm
Cable entry	1xM40 top and 1xM32/M40 bottom
Height	278mm
Width	184mm
Depth	223mm
Dimension of enclosure	276x184 mm (HxW)
Material of enclosure	Polyester RAL 7035
Contacts	the contacts are brass nickel plated, The contact carrier is made of polyamide

Additional technical information	
	The cable entry is one at top and two at bottom open
	With fuse base 3 pole D III

Logistics data	
Weight/pcs	2.64 kg / Piece

Logistics data	
Packaging	Carton
Content amount	1 ST
EAN	4024941150057
Length	335 mm
Width	283 mm
Height	268 mm
Weight	2.99 kg
Volume	21,937.5 ccm

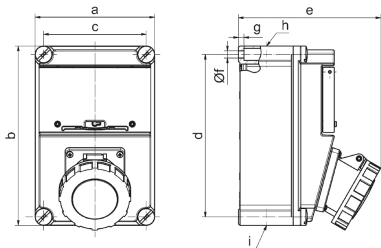

14 MB 36

Ampere	32	32	63	63				
Polzahl	4	5	4	5				
a	184,0	184,0	184,0	184,0				
b	276,0	276,0	276,0	276,0				
c	158,0	158,0	158,0	158,0				
d	250,0	250,0	250,0	250,0				
e	205,0	205,0	220,0	220,0				
f $\varnothing$	11,0	11,0	11,0	11,0				
g	8,5	8,5	8,5	8,5				
h	M40	M40	M40	M40				
i	M40/32	M40/32	M40/32	M40/32				