

wall mounting socket outlet, fused - housing dimensions 260x160 with fuse base D III




Product description	
BALS-Prd.-Nr	15087
EAN	4024941150873
Product category	Wall mounting socket outlet, fused, Wall mounting socket outlet, fused
Current	63A, 63A
Number of poles	4p, 4p
Arrangement of phases	3P+PE, 3P+PE
Position of earth contact	7 h, 7 h
Voltage	480 - 500V~, 480 - 500V~

Product description	
Frequency	50/60Hz, 50/60Hz
Protection degree	IP44, IP44
Colour code	black RAL 9005, black RAL 9005
Colour of appliance	Hinged lid black RAL 9005, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Operating window smoky topaz, Housing screws grey RAL 7035, Hinged lid black RAL 9005, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Operating window smoky topaz, Housing screws grey RAL 7035
Connection design	screw terminal as box terminal with Kontex-contact, screw terminal as box terminal with Kontex-contact
Maximum conductor size	25.0 qmm, 25.0 qmm
Cable entry	1xM40 top and 1xM32/M40 bottom, 1xM40 top and 1xM32/M40 bottom
Height	276mm, 276mm
Width	184mm, 184mm
Depth	220mm, 220mm
Dimension of enclosure	276x184 mm (HxW), 276x184 mm (HxW)
Material of enclosure	Polyester RAL 7035, Polyester RAL 7035
Contacts	the contacts are brass nickel plated, The contact carrier is made of polyamide, the contacts are brass nickel plated, The contact carrier is made of polyamide

Additional technical information	
	The cable entry is one at top and two at bottom open, The cable entry is one at top and two at bottom open
	With fuse base 3 pole D III, With fuse base 3 pole D III

Logistics data	
Weight/pcs	2.402 kg / Piece
Packaging	Carton
Content amount	1 ST
EAN	4024941150873
Length	335 mm
Width	283 mm
Height	268 mm
Weight	2.752 kg
Volume	21,937.5 ccm

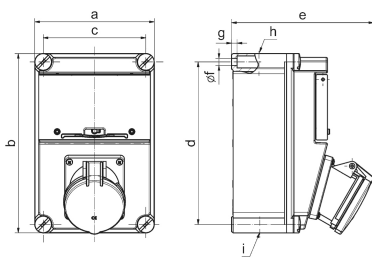

14 MB 35

Ampere Polzahl	32 4	32 5	63 4	63 5				
a	184,0	184,0	184,0	184,0				
b	276,0	276,0	276,0	276,0				
c	158,0	158,0	158,0	158,0				
d	250,0	250,0	250,0	250,0				
e	205,0	205,0	220,0	220,0				
f ø	11,0	11,0	11,0	11,0				
g	8,5	8,5	8,5	8,5				
h	M40	M40	M40	M40				
i	M40/32	M40/32	M40/32	M40/32				