


Phase inverter - with TE screw terminals for harsh applications

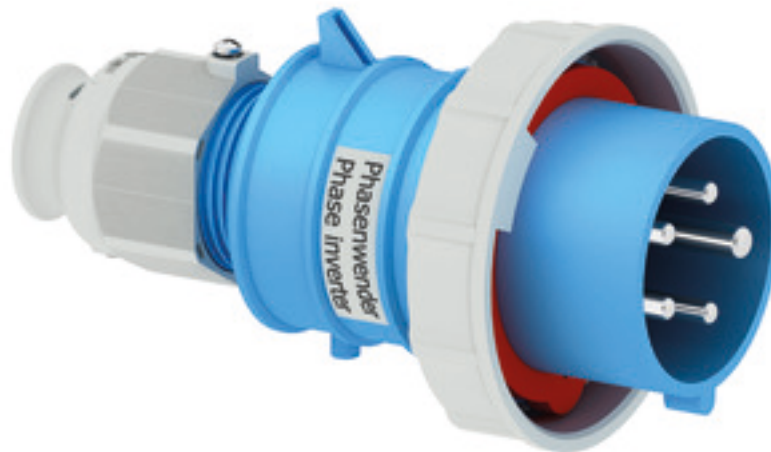

| Product description | |
|---------------------------|---------------------|
| BALS-Prd.-Nr | 2266 |
| EAN | 4024941022668 |
| Product category | TE phase inverter |
| Current | 16A |
| Number of poles | 5p |
| Arrangement of phases | 3p+N+PE |
| Position of earth contact | 9 h |
| Voltage | 120/208 - 144/250V~ |

| Product description | |
|------------------------|--|
| Frequency | 50/60Hz |
| Protection degree | IP67 |
| Colour code | blue RAL 5015 |
| Colour of appliance | Collar blue RAL 5015, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035, Housing cover blue RAL 5015 |
| Connection design | with screw terminal |
| Maximum conductor size | 2,5 qmm |
| Cable entry | with cable gland |
| Height | 154mm |
| Width | 87mm |
| Depth | 87mm |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical information | |
|----------------------------------|--|
| | For cable diameter from 10 up to max. 21 mm, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings |

| Logistics data | |
|----------------|-----------------|
| Weight/pcs | 0.25 kg / Piece |
| Packaging | Bag |

| Logistics data | |
|----------------|---------------|
| Content amount | 1 ST |
| EAN | 4024941022668 |
| Length | 89 mm |
| Width | 87 mm |
| Height | 154 mm |
| Weight | 0.251 kg |
| Volume | 1,192.422 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941834292 |
| Length | 258 mm |
| Width | 183 mm |
| Height | 212 mm |
| Weight | 2.652 kg |
| Volume | 8,750 ccm |

