

TN panel mounting appliance inlet, angled - flange 85x85, fixing centers 70x70




| Product description | |
|---------------------------|---|
| BALS-Prd.-Nr | 27107 |
| EAN | 4024941271073 |
| Product category | TN panel mounting appliance inlet, angled |
| Current | 32A |
| Number of poles | 5p |
| Arrangement of phases | 3p+N+PE |
| Position of earth contact | 9 h |
| Voltage | 120/208 - 144/250V~ |

| Product description | |
|--------------------------------|--|
| Frequency | 50/60Hz |
| VG-type-no.: | VG 96919 BP 006 |
| Protection degree | IP67 |
| Colour code | bronze-green RAL 6031-F9 |
| Colour of appliance | Collar bronze-green RAL 6031-F9, Closure cap bronze-green RAL 6031-F9, Bayonet ring bronze-green RAL 6031-F9, Enclosure bronze-green RAL 6031-F9 |
| Connection design | with screw terminal |
| Maximum conductor size | 6,0 qmm |
| Cable entry | other |
| Height | 107mm |
| Width | 101.5mm |
| Depth | 104mm |
| Flange size vertical in mm | 85mm |
| Flange size horizontal in mm | 85mm |
| Drill hole dist. vertical mm | 70mm |
| Drill hole dist. horizontal mm | 70mm |
| Material of enclosure | Polyamide |
| Contacts | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical information | |
|----------------------------------|------------------------|
| | The inclination is 10° |

| Additional technical information | |
|----------------------------------|------------------|
| | With closure cap |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.365 kg / Piece |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941839280 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 3.852 kg |
| Volume | 13,588.4 ccm |

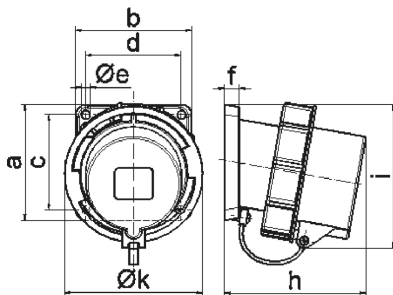

| Ampere | 16 | 16 | 16 | 32 | 32 | 32 |
|----------------------------|------|------|-------|-------|-------|-------|
| Polzahl | 3 | 4 | 5 | 3 | 4 | 5 |
| a | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 |
| b | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 | 85,0 |
| c | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 |
| d | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 | 70,0 |
| e ø | 6,3 | 6,3 | 6,3 | 6,3 | 6,3 | 6,3 |
| f | 11,0 | 11,0 | 11,0 | 11,0 | 11,0 | 11,0 |
| h | 94,0 | 94,0 | 94,0 | 105,0 | 105,0 | 105,0 |
| i | 94,0 | 97,0 | 101,0 | 103,0 | 103,0 | 107,0 |
| k | 70,5 | 78,5 | 86,5 | 94,0 | 94,0 | 101,5 |
| Leiter mm ² min | 1,0 | 1,0 | 1,0 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 2,5 | 2,5 | 2,5 | 6,0 | 6,0 | 6,0 |

5 MB 31