

Flanged appliance inlet - flange 75x75 fixing centers 60x60




Product description	
BALS-Prd.-Nr	2815
EAN	4024941028158
Product category	TE flanged appliance inlet straight
Current	32A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~

Product description	
Frequency	50/60Hz
Protection degree	IP44
Colour code	red RAL 3000
Colour of appliance	Enclosure red RAL 3000
Connection design	with screw terminal
Maximum conductor size	6,0 qmm
Cable entry	other
Height	75mm
Width	75mm
Depth	82mm
Flange size vertical in mm	75mm
Flange size horizontal in mm	75mm
Drill hole dist. vertical mm	60mm
Drill hole dist. horizontal mm	60mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical information	
	A retaining device to match the hinged cover of the connector must be provided to ensure the latching feature
	Collar in middle of flange

Logistics data	
Weight/pcs	0.184 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941028158
Length	82 mm
Width	75 mm
Height	75 mm
Weight	0.185 kg
Volume	461.25 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941819077
Length	245 mm
Width	177 mm
Height	185 mm
Weight	1.973 kg
Volume	7,140 ccm

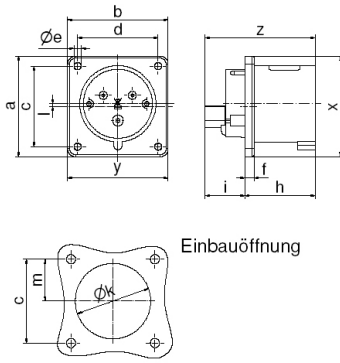

Ampere	32	32	32
Polzahl	3	4	5
a	75	75	75
b	75	75	75
c	60	60	60
d	60	60	60
Øe	5,5	5,5	5,5
f	7	7	7
h	53	53	53
i	30	30	30
Øk	57	57	60
l	2	2	-
m	28	28	30
x	75	75	75
y	75	75	75
z	82	82	82