


connector - with screwless terminals, lockable

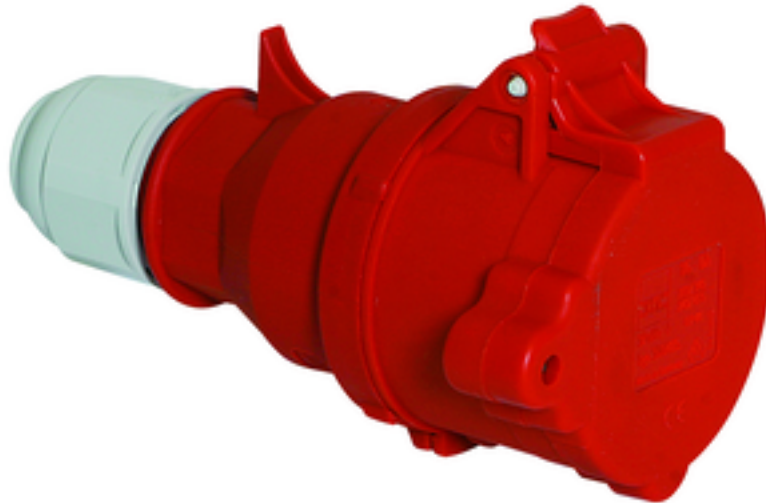


Product description	
BALS-Prd.-Nr	310634
EAN	4024941197533
Product category	QUICK-CONNECT connector
Current	16A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~
Frequency	50/60Hz

Product description	
Protection degree	IP44
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Cable gland grey RAL 7035, Housing cover red RAL 3000, Collar red RAL 3000
Connection design	screwless spring-clamp technology
Maximum conductor size	2,5 qmm
Cable entry	with cable gland
Height	155mm
Width	84mm
Depth	91mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, the contacts are brass nickel plated

Additional technical information	
	For cable diameter from 8 up to max. 18 mm, Screwless housing connection with snap fastening, Multi-Grip cable gland with gasket and integrated strain relief, The connector is lockable with the plug art.-no. 210950 and padlock art.no. 580642

Logistics data	
Weight/pcs	0.186 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941197533
Length	91 mm
Width	84 mm
Height	155 mm
Weight	0.187 kg
Volume	1,184.82 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941835411
Length	258 mm
Width	183 mm
Height	212 mm
Weight	2.012 kg
Volume	8,750 ccm

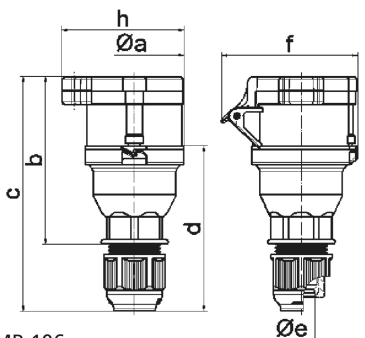

Ampere	16	32				
Polzahl	5	5				
a ø	66,0	74,5				
b	113,5	134,5				
c	154,0	187,0				
d	105,5	128,5				
e ø	18,0	23,0				
f	86,0	97,0				
h	82,0	100,0				
Leiter mm ² min	1	2,5				
Leiter mm ² max	2,5	6				

3 MB 106