


connector - with screwless terminals, for harsh applications

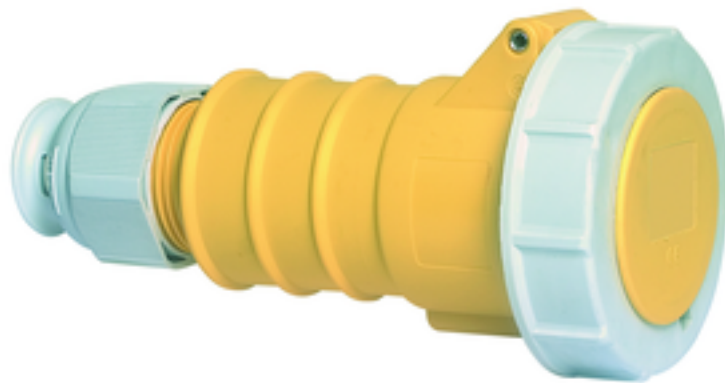

Product description	
BALS-Prd.-Nr	31305
EAN	4024941313056
Product category	QUICK-CONNECT TE connector
Current	16A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	4 h
Voltage	57/100 - 75/130V~

Product description	
Frequency	50/60Hz
Protection degree	IP67
Colour code	yellow RAL 1012
Colour of appliance	Hinged lid yellow RAL 1012, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035, Enclosure yellow RAL 1012
Connection design	screwless spring terminals with Kontex-Kontakt
Maximum conductor size	2,5 qmm
Cable entry	with cable gland
Height	168mm
Width	87mm
Depth	92mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical information	
	Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings, For cable diameter from 10 up to max. 21 mm

Logistics data	
Weight/pcs	0.244 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941313056
Length	92 mm
Width	87 mm
Height	168 mm
Weight	0.245 kg
Volume	1,344.672 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941835077
Length	258 mm
Width	183 mm
Height	212 mm
Weight	2.592 kg
Volume	8,750 ccm

