

Explosion proof plug low voltage




Product description	
BALS-Prd.-Nr	44082
EAN	4024941000598
Product category	ELV plug, explosion proof
Current	16A
Number of poles	3p
Arrangement of phases	3P
Position of earth contact	no minor keyway
Voltage	20 up to 25v
Frequency	50/60Hz

Product description	
Protection degree	IP54
Colour code	violet RAL 4005
Connection design	with screw terminal
Ex-class	IIC
For Ex-zone gas	1, 2
For Ex-Zone dust	21, 22
Cable entry	straight
Material of enclosure	plastic
Height	140mm
Width	53mm
Depth	53mm

Additional technical information	
	For use in zone 2 and 22, For use in zone 1 and 21

Logistics data	
Weight/pcs	0.23 kg / Piece
Packaging	Bag
Content amount	1 ST
Length	53 mm
Width	53 mm
Height	140 mm

Logistics data	
Weight	0.231 kg
Volume	393.26 ccm

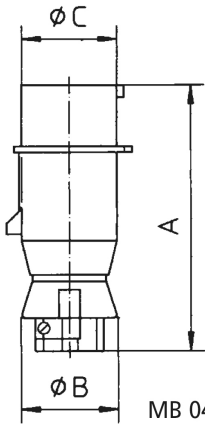

MB 04510E00

Ampere	16	16					
Polzahl	2	3					
A	140,0	140,0					
ø B	53,0	53,0					
ø C	42,0	42,0					