


Connector low voltage - with cable gland for cable diameter up to 24,5 mm

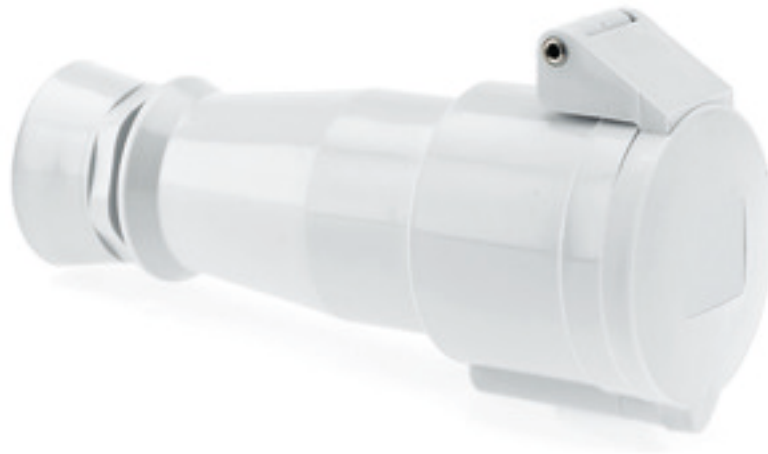

Product description	
BALS-Prd.-Nr	4500
EAN	4024941045001
Product category	ELV connector
Current	63A
Number of poles	3p
Arrangement of phases	3P
Position of earth contact	12 h
Voltage	40 up to 50V

Product description	
Frequency	50/60Hz
Protection degree	IP44
Colour code	grey RAL 7035
Colour of appliance	Hinged lid grey RAL 7035, Cable gland grey RAL 7035, Enclosure grey RAL 7035
Connection design	with screw terminal
Maximum conductor size	16,0 qmm
Cable entry	with cable gland
Height	185mm
Width	66mm
Depth	90mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical information	
	For cable diameter up to max. 24,5 mm, With cable gland

Logistics data	
Weight/pcs	0.305 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941045001
Length	90 mm
Width	66 mm
Height	185 mm
Weight	0.306 kg
Volume	1,098.9 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941935685
Length	258 mm
Width	183 mm
Height	212 mm
Weight	3.202 kg
Volume	8,750 ccm