


## connector low voltage - with cable gland, for cable diameter up to 24,5 mm

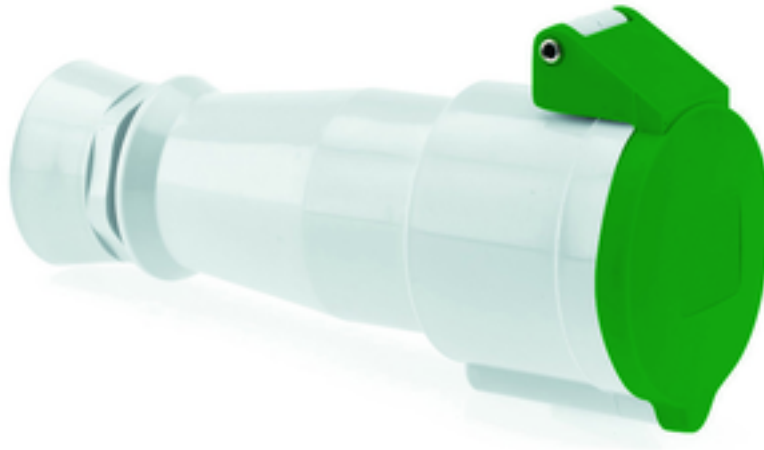


Product description	
BALS-Prd.-Nr	4502
EAN	4024941045025
Product category	ELV connector
Current	63A
Number of poles	3p
Arrangement of phases	3P
Position of earth contact	4 h
Voltage	20 up to 25 and 40 up to 50V

Product description	
Frequency	100 - 200Hz
Protection degree	IP44
Colour code	green RAL 6002
Colour of appliance	Hinged lid green RAL 6002, Enclosure green RAL 6002, Cable gland grey RAL 7035
Connection design	with screw terminal
Maximum conductor size	16,0 qmm
Cable entry	with cable gland
Height	185mm
Width	66mm
Depth	90mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical information	
	With cable gland, For cable diameter up to max. 24,5 mm

Logistics data	
Weight/pcs	0.308 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941045025
Length	90 mm
Width	66 mm
Height	185 mm
Weight	0.309 kg
Volume	1,098.9 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941819527
Length	258 mm
Width	183 mm
Height	212 mm
Weight	3.232 kg
Volume	8,750 ccm



16 MB 10

Ampere	63	63							
Polzahl	2	3							
a ø	66,5	66,5							
b	183,0	183,0							
c	91,0	91,0							
d ø	24,5	24,5							