

# Connector low voltage - with cable gland MULTI-GRIP




Product description	
BALS-Prd.-Nr	4524
EAN	4024941045247
Product category	ELV connector
Current	16A
Number of poles	2p
Arrangement of phases	2P
Position of earth contact	4 h
Voltage	20 up to 25 and 40 up to 50V
Frequency	100 - 200Hz

Product description	
Protection degree	IP44
Colour code	green RAL 6002
Colour of appliance	Hinged lid green RAL 6002, Housing cover grey RAL 7035, Cable gland grey RAL 7035, Collar grey RAL 7035
Connection design	with screw terminal
Maximum conductor size	10,0 qmm
Cable entry	with cable gland
Height	152mm
Width	62mm
Depth	67mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of polyamide, the contacts are brass nickel plated

Additional technical information	
	MULTI-GRIP cable gland with gasket and integrated strain relief, For cable diameter from 11 up to max. 23,5 mm

Logistics data	
Weight/pcs	0.184 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941045247

Logistics data	
Length	67 mm
Width	62 mm
Height	152 mm
Weight	0.185 kg
Volume	631.408 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941837613
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.965 kg
Volume	5,737.5 ccm

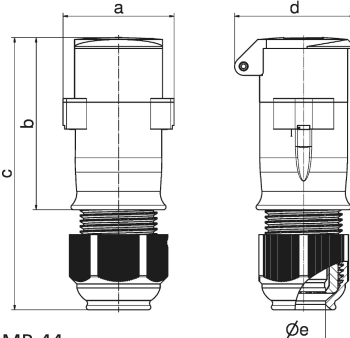

16 MB 44

Ampere	16	16	32	32			
Polzahl	2	3	2	3			
a	62,0	62,0	62,0	62,0			
b	96,0	96,0	96,0	96,0			
c	152,0	152,0	152,0	152,0			
d	67,0	67,0	67,0	67,0			
e ø	24,5	24,5	24,5	24,5			
Leiter mm <sup>2</sup> min	4	4	4	4			
Leiter mm <sup>2</sup> max	10	10	10	10			