

Connector TN - with cable gland with bayonet cover





| Product description | |
|---------------------------|----------------------------|
| BALS-Prd.-Nr | 310172 |
| EAN | 4024941108553 |
| Product category | QUICK-CONNECT TN connector |
| Current | 32A |
| Number of poles | 4p |
| Arrangement of phases | 3P+PE |
| Position of earth contact | 2 h |
| Voltage | > 50V~ |
| Frequency | > 300 - 500Hz |

| Product description | |
|------------------------|--|
| VG-type-no.: | VG 96919 DS 027 |
| Protection degree | IP67 |
| Colour code | bronze-green RAL 6031-F9 |
| Colour of appliance | Cable gland bronze-green RAL 6031-F9, Bayonet ring bronze-green RAL 6031-F9, Hinged lid bronze-green RAL 6031-F9, Enclosure bronze-green RAL 6031-F9 |
| Connection design | screwless spring terminals with KONTEX-contact |
| Maximum conductor size | 6,0 qmm |
| Cable entry | with cable gland |
| Height | 200mm |
| Width | 94mm |
| Depth | 96.5mm |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical information | |
|----------------------------------|--|
| | For cable diameter from 11 up to max. 23,5 mm, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings |
| | With bayonet cover on strap |

| Logistics data | |
|----------------|----------------|
| Weight/pcs | 0.0 kg / Piece |

| Logistics data | |
|----------------|---------------|
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941839938 |
| Length | 330 mm |
| Width | 216 mm |
| Height | 260 mm |
| Weight | 0.226 kg |
| Volume | 17,062.5 ccm |

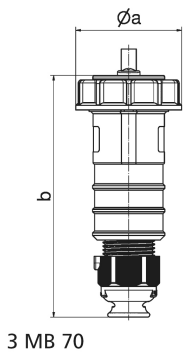

| Ampere | 16 | 16 | 16 | 32 | 32 | 32 |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Polzahl | 3 | 4 | 5 | 3 | 4 | 5 |
| a ø | 70,5 | 78,0 | 86,5 | 94,0 | 94,0 | 101,5 |
| b | 161,0 | 161,0 | 168,0 | 196,0 | 196,0 | 200,0 |
| c | 77,0 | 83,0 | 93,0 | 99,0 | 99,0 | 107,0 |
| d ø | 18,0 | 18,0 | 21,0 | 23,0 | 23,0 | 27,0 |
| Leiter mm ² min | 1,0 | 1,0 | 1,0 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 2,5 | 2,5 | 2,5 | 6,0 | 6,0 | 6,0 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |